1335MD Light Preventative Maintenance

Daily Maintenance:

If you are using surface disinfectants, then it is very important to remove the residue they leave behind daily.

For plastic and metal parts, remove ordinary dirt and smudges with a mild soap and water solution.

Never spray disinfectant directly onto the surface.

Monthly Maintenance:

Tighten light head and flex arm adjustment screws if necessary.

2. Using a 3/16 inch allen wrench turn the hex bolt clockwise toward the spring to increase tension and counter clockwise away from the spring to decrease.
3. Once adjusted gently snap the flex arm cover into place.

2. Use a deep well 14mm socket (Clockwise to tighten)

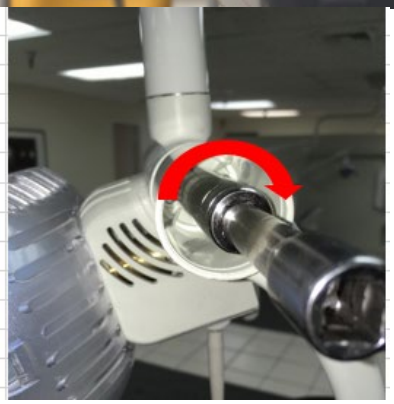

Annual Maintenance:

Lubricate flex arm contact points.

Change bulb if necessary.